



December 11, 2008
Release: Series 9 Release 16

For immediate release
TSX Venture: TDC

**TYHEE ANNOUNCES ADDITIONAL DIAMOND DRILLHOLE RESULTS FROM
GOODWIN LAKE AND CLAN LAKE PROPERTIES, YELLOWKNIFE GOLD BELT, NWT, CANADA**

VANCOUVER, BC (December 11, 2008) - Tyhee Development Corp. (TSX-V: TDC) today announced the final results of gold assays from the second phase of diamond drilling at Goodwin Lake and Clan Lake, Yellowknife Gold Belt, NWT, Canada.

Highlighted intersections from the recent program:

Goodwin Lake:

- Drillhole GL022: 35.5 metres (m) of 1.83 grams per tonne (gpt) gold Including:
16.5m of 3.33 gpt gold; and
16.5 m of 1.40 gpt.
- Drillhole GL024 10.5 m of 8.38 gpt gold
- Drillhole GL028: 6.0 m of 2.04 gpt gold

Clan Lake:

- Drillhole CL134: 9.0 m of 1.50 gpt gold; and
4.0 m of 2.01 gpt gold; and
1.0 m of 29.20 gpt gold.
- Drillhole CL137: 11.8 m of 1.27 gpt gold including:
5.8 m of 2.17 gpt gold
- Drillhole CL138: 10.0 m of 1.36 gpt gold; and
4.3 m of 6.99 gpt gold.
- Drillhole CL139: 2.7 m of 6.57 gpt gold
- Drillhole CL140 3.0 m of 13.09 gpt gold; and
4.5 m of 13.93 gpt gold.
- Drillhole CL141 3.0 m of 5.29 gpt gold

“The results from Goodwin Lake, together with the initial 20 drillholes previously reported, expand the VAD Zone, and define a significant new discovery in the Yellowknife Gold Belt, 13 km south of our established resource at the Ormsby Zone,” said Dave Webb, President and CEO of Tyhee Development Corp. “While the Clan Lake results continue to expand the boundary of the Main Zone, additional zones have also been identified both to the east and west, suggesting the potential for additional gold mineralization at Clan Lake.”

The Main Zone of Clan Lake has now been diamond drilled over a 400 m strike length (open) and in places to a depth of 300 m (open). While additional drilling will be required to confirm the continuity of the Main Zone, initial results appear to identify one or more gold-bearing zones cumulatively ranging up to more than 80 m in width in places within a domain that is up to 100 m wide. A resource estimate is being prepared, and is anticipated some time in the first quarter of 2009.

The Clan Lake Main Zone gold mineralization is associated with silicification, quartz veining, and quartz breccias with significant pyrrhotite and arsenopyrite disseminations. Previous work included trenching, diamond drilling, and a bulk sample. It is 485 m long, up to 65 m wide, poorly exposed to the northwest, and has not been explored in detail to the southeast

Gold mineralization at Goodwin Lake is constrained within a strataform mafic rock of diorite composition within turbiditic metasediments. Macroscopically the rock appears unaltered with the exception of numerous irregular, discontinuous quartz veins. Minor sulfide enrichment accompanies some of the silicification. Microscopically substantial metasomatism is apparent with evidence of silicification and potassium enrichment. Tyhee will review the Goodwin data to determine if it is possible to establish a resource on the VAD Zone.

Maps that show the drillhole locations can be found at www.tyhee.com

Plans for winter drilling are in place, and the decision to commence will be deferred until late winter. Tyhee continues to extract the maximum value from its extensive database, continuing resource optimization and engineering studies while working to obtain production permits for its wholly owned Yellowknife Gold Project.

About Tyhee Development Corp.

Tyhee Development Corp. is a gold exploration and development company currently focused on the historic Yellowknife Gold Camp, NWT, Canada. It is the largest property holder in the historic camp, and has the largest exploration and development program underway in the region. Its principal asset is the advanced-stage Yellowknife Gold Project, which consists of 6,625 hectares (15,481 acres) of mining leases located 90 km (56 miles) north of Yellowknife, NWT, Canada.

Tyhee completed fire assays on drill core samples using 30 gram aliquots with ICP-ES finish for gold analyses, prepared at Acme Analytical Laboratories Ltd. in Yellowknife, and finished at Acme Analytical Laboratories Ltd in Vancouver. A semi-quantitative multi-element analysis is run on 0.5 gm aliquot samples leached in a hot aqua regia solution and measured using ICP-ES techniques. Tyhee conducts a rigorous QA/QC program of inserting blanks and duplicates in the field and standards in the laboratory. The laboratory also conducted their own independent QA/QC program including inserting their own standards and rerunning samples from pulped material and reject material. These results were provided to Tyhee. All standards, duplicates, blanks and check assays returned acceptable results. Mr. Val Pratico, P.Geol., Tyhee's Chief Geologist is the designated QP within the meaning of NI 43-101, has reviewed this release and approves of its content.

NO REGULATORY AUTHORITY HAS APPROVED OR DISAPPROVED THE CONTENT OF THIS RELEASE. THE TSX VENTURE EXCHANGE DOES NOT ACCEPT RESPONSIBILITY FOR THE ADEQUACY OR ACCURACY OF THIS RELEASE.

Tyhee's shares trade on the TSX Venture Exchange under the symbol "TDC". For additional information, please visit the Company's website, www.tyhee.com.

For further information please contact:

Tyhee Development Corp.
David Webb, President and CEO
Tel: 604-681-2877 [toll free 1-866-681-2877]
info@tyhee.com

The Equicom Group Inc.
Tom McMillan
Tel: 403-536-5903
tmcmillan@equicomgroup.com

Table 1. Recent diamond drillholes from Goodwin Lake.

DDH	From	To	Thickness	Grade
GL021	21.0	22.5	1.5	1.31
and	40.5	42.0	1.5	3.42
GL022	8.5	44.0	35.5	1.83
incl	8.5	25.0	16.5	3.33
and	101.0	102.5	1.5	1.09
and	155.0	171.5	16.5	1.40
incl	162.5	165.5	3.0	2.83
and	168.5	171.5	3.0	2.24
GL023	82.5	84.0	1.5	41.95
and	94.0	95.5	1.5	3.15
GL024	1.5	12.0	10.5	8.38
incl	10.5	12.0	1.5	56.65
and	25.0	31.0	6.0	0.86
GL025	105.0	106.0	1.0	1.41
GL026	60.5	62.0	1.5	1.09
GL027	77.5	79.0	1.5	5.40
GL028	29.0	35.0	6.0	2.04
incl	29.0	30.5	1.5	5.73


True width is not known at this time.

Table 2. Recent diamond drillholes from Clan Lake.

DDH	From	To	Thickness	Grade
CL134	55.5	64.5	9.0	1.50
and	167.9	172.0	4.1	0.84
and	422.0	426.0	4.0	2.01
and	438.0	439.0	1.0	29.20
CL135	5.0	6.5	1.5	1.62
and	9.0	10.55	1.55	1.08
and	53.6	62.8	9.2	1.21
incl	53.6	58.7	5.1	1.80
and	73.7	74.7	1.0	1.45
and	125.4	126.7	1.3	14.23
and	195.5	196.8	1.3	1.88
CL136	99.0	100.0	1.0	26.05
and	138.0	139.0	1.0	1.02
CL137	54.6	55.8	1.2	1.04
and	77.6	88.2	10.6	0.72
incl	77.6	78.5	0.9	3.61
and	123.6	125.0	1.4	1.03
and	148.2	160.0	11.8	1.27

incl	148.2	154.0	5.8	2.17
and	262.3	263.8	1.5	1.56
and	278.5	279.5	1.0	2.56
and	300.0	301.4	1.4	1.74
CL138	44.3	45.6	1.3	1.96
and	56.0	57.2	1.2	2.02
and	62.5	64.0	1.5	1.71
and	72.0	82.0	10.0	1.36
and	250.0	254.3	4.3	6.99
CL139	109.3	128.0	18.7	0.84
incl	109.3	111.5	2.2	4.42
and	163.0	165.7	2.7	6.57
and	288.5	290.0	1.5	1.16
and	312.0	340.0	28	0.73
incl	312.0	314.8	2.8	2.45
incl	337.0	340.0	3.0	2.71
CL140	19.5	21.0	1.5	1.62
and	116.5	119.5	3.0	13.09
and	239.5	244.0	4.5	13.93
CL141	130.0	131.5	1.5	1.18
and	209.4	210.0	0.6	3.96
and	304.0	305.5	1.5	1.34
and	334.0	369.5	35.5	0.78
incl	334.0	337.0	3.0	5.29
CL142	139.5	160.0	20.5	0.82
incl	139.5	141.0	1.5	1.72
and	145.5	147.0	1.5	1.68
and	159.0	160.0	1.0	10.66
and	240.5	241.5	1.0	1.48

True width is not known at this time

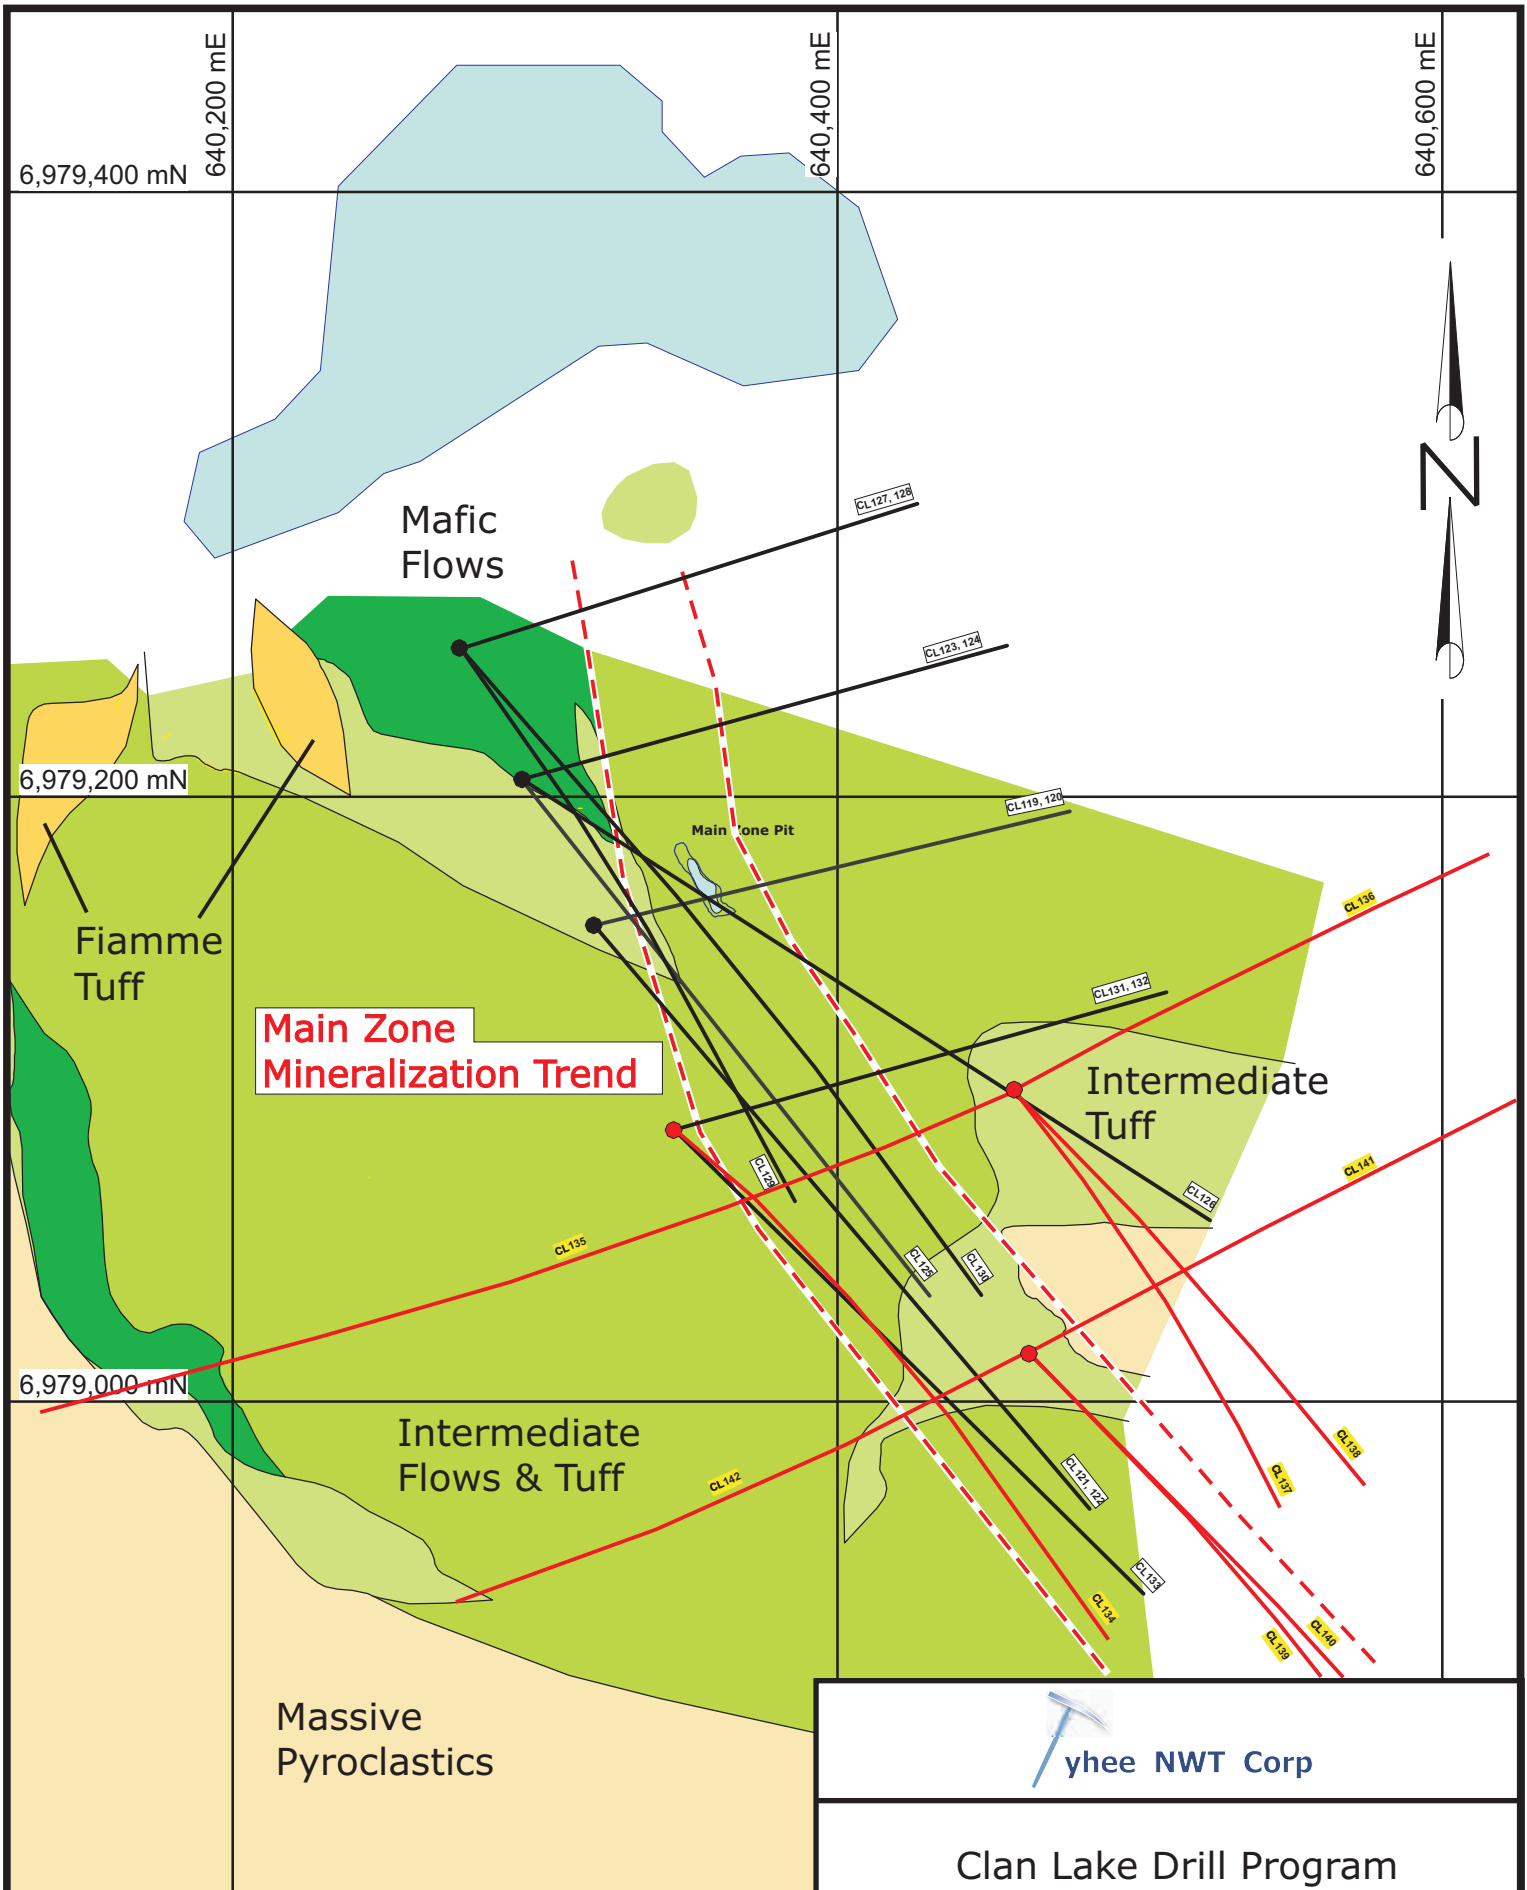

**Main Zone
Mineralization Trend**



Clan Lake Drill Program

UTM grid NAD83 Zone 11

Drawn by VP

Scale 1 : 2,500

Dec 2008